

Nuance I Light Pendant

KC1023 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

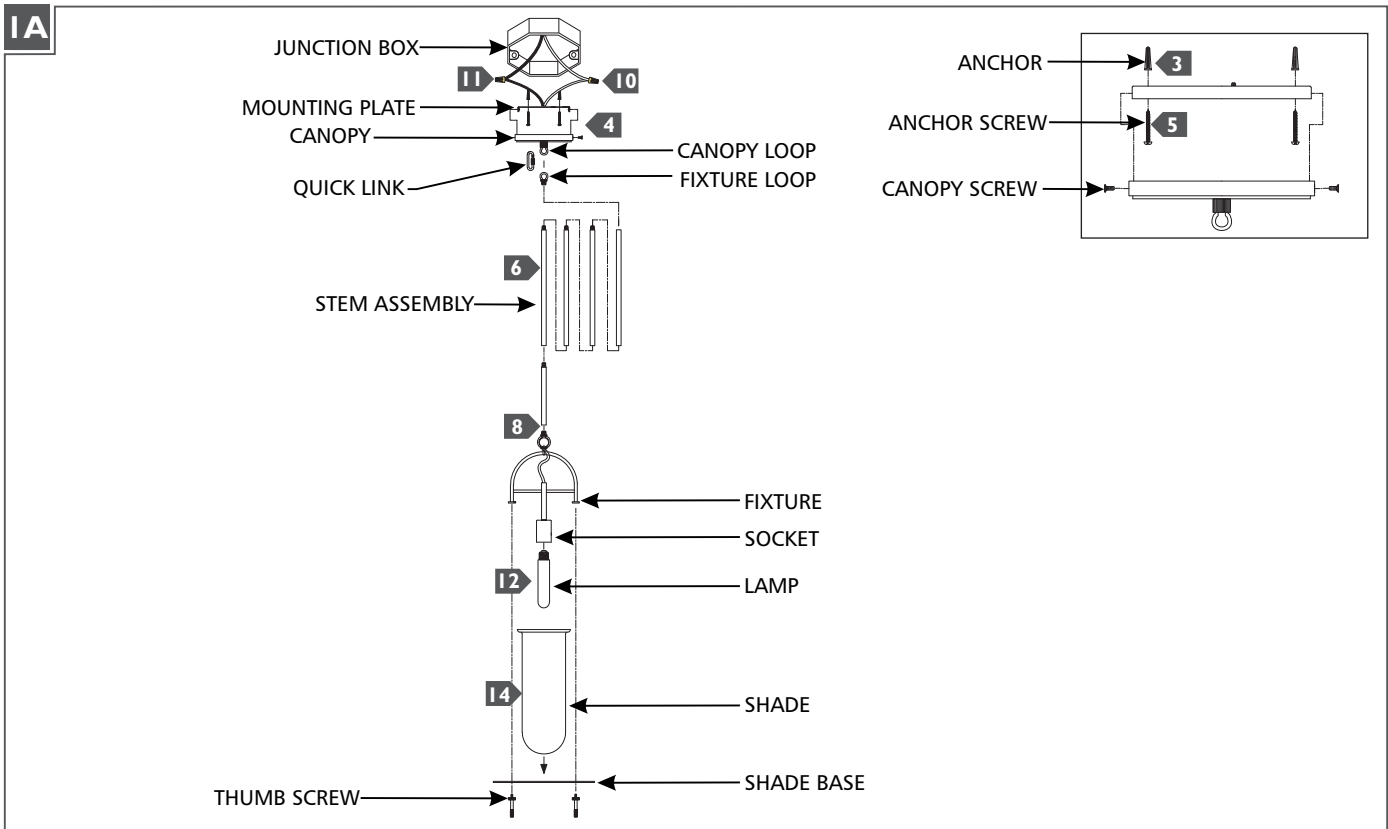

- 1 Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
- 3 Drill appropriate sized holes and install the anchors.
- 4 Secure the mounting plate to the junction box.
- 5 Screw the anchor screws into the anchors.
- 6 Determine the wanted height or look of the fixture with the provided stems and fixture loop then assemble them by screwing them together.
- 7 Feed the fixture wires through the stem assembly and screw it onto the fixture.
- 8 Feed the fixture wired through the canopy. Install a quick link onto the fixture loop and canopy loop, use the fiberglass sleeve on the exposed wired if needed.
- 9 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 11 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 12 Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place with the provided canopy screws.
- 13 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information. Repeat for each socket.
- 14 Gently place the shades into the shade bases and secure the shade bases to the fixture with the provided thumb screws. Repeat for each light.

SAVE THESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.